


- 不锈钢材质，三梁结构，焊接密封，压向承载
- 防护等级 IP68
- 适用于电子计价秤、电子台秤、皮带秤及各类电子称重设备
- 最大秤台尺寸: 10kg-50kg 400mm × 400mm
100kg-500kg 600mm × 600mm




技术指标

额定载荷	kg	10/20/50/60/75/100/150/200/300/400/500/600			
精度		C3	C4	A6M	A6S
认证		OIML R60 C3	OIML R60 C4		
最大检定分度数	nmax	3000	4000		
最小检定分度值	Vmin	Emax/10000	Emax/15000	Emax/15000	Emax/20000
综合误差	(%FS)	≤ ±0.0200	≤ ±0.0173	≤ ±0.0113	≤ ±0.009
蠕变	(%FS/30min)	≤ ±0.0245	≤ ±0.0184	≤ ±0.0184	≤ ±0.008
温度对输出灵敏度的影响	(%FS/10℃)	≤ ±0.0117	≤ ±0.0088	≤ ±0.0088	≤ ±0.006
温度对零点输出的影响	(%FS/10℃)	≤ ±0.0140	≤ ±0.0093	≤ ±0.0093	≤ ±0.007
输出灵敏度	(mV/V)	2.0 ± 0.2			
输入阻抗	(Ω)	10kg/20kg/50kg/75kg			100kg~600kg
		380 ± 15			350 ± 3.5
输出阻抗	(Ω)	351 ± 3.5			
绝缘阻抗	(MΩ)	≥ 5000(50VDC)			
零点输出	(%FS)	≤ ±2.0			
温度补偿范围	(℃)	-10 ~ +40			
允许使用温度范围	(℃)	-35 ~ +70			
推荐激励电压	(V)	5 ~ 12(DC)			
最大激励电压	(V)	18(DC)			
安全过载范围	(%FS)	150			
极限过载范围	(%FS)	300			
推荐安装扭矩	N.m	10kg/20kg/50kg/75kg		100kg~600kg	
		10		20	
防护等级		IP68/IP69K			


外形尺寸 mm(inch)

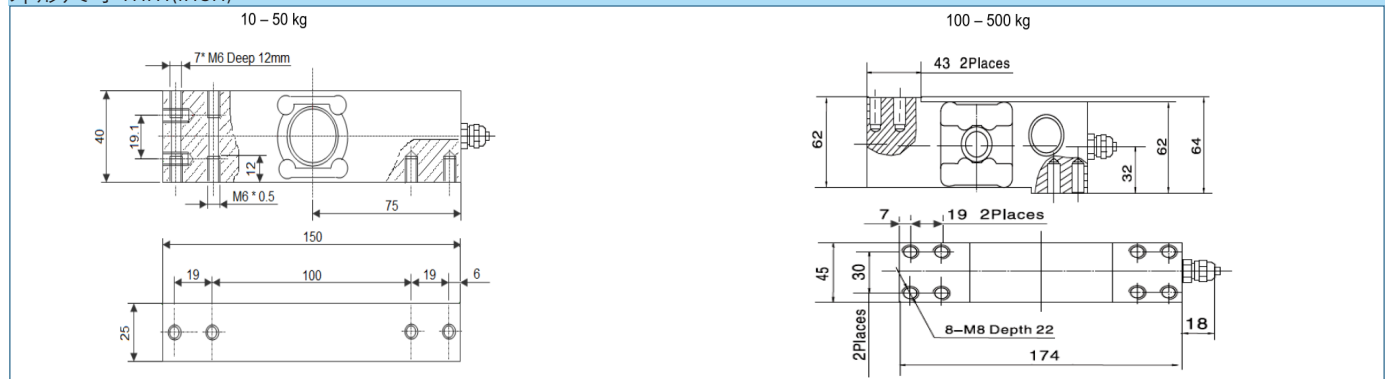

接线方式



- 六芯屏蔽电缆线：Φ5mm
- 标准长度：3m



- 四芯屏蔽电缆线：Φ5mm
- 标准长度：3m