
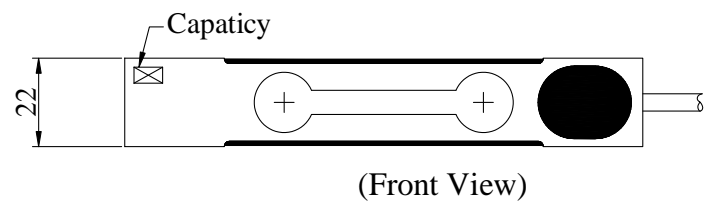


### Dimensions(mm)

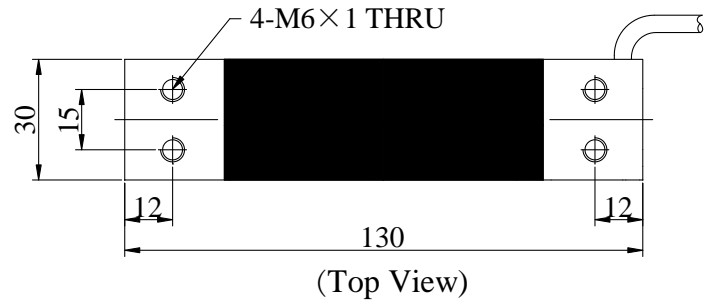

Usage & Features: Pricing Scale、Counting Scale

## Specification

Rated Capacities	30,60,100,200 (kg)
Rated Output	2.0 mV/V±10%
Zero Balance	±0.0200 mV/V
Accuracy class	OIML C3
Non-linearity	0.02 %R.O.
Hysteresis	0.02 %R.O.
Repeatability	0.02 %R.O.
30mins Creep	0.02 %R.O.
30mins Return	0.02 %R.O.
Safe Overload	150 %R.O.
Ultimate Overload	200 %R.O.
Temperature Effect On Output	0.002 %R.O./°C
Temperature Effect On Zero	0.003 %R.O./°C
Input Impedance	410±15 Ω; 1130±30 Ω
Output Impedance	350±5 Ω;1000±10 Ω
Insulation Impedance	≥5000 MΩ(50VDC)
Recommended Excitation	5~12 VDC
Maximum Excitation	15 VDC
Operating Temperature Range	-20~60 °C
Construction	Aluminum Alloy
Protection Class	IP66 / IP67
Cable	φ4×0.5m
Recommended Platform Size	350×350 mm
Mode of Connection	Red (EXC+),Black (EXC-),Green (SIG+),White (SIG-)